




DUNCAN RACING REED PEDAL INSTALLATION for STOCK REED CAGES

1. Remove the reed cage assembly from the cylinder.
2. Remove the existing reed pedals from the reed cage.
3. Place the replacement reed pedals on the cage, position the rev-strip on top of the pedals, followed by the stock reed stops.
4. Center the reeds on the cage, install and tighten the mounting screws.
5. Install the reed cage back into the cylinder using new intake manifold gaskets. Torque to 8-10 ft. lbs. in a criss cross pattern by graduations of 5 ft. lbs.

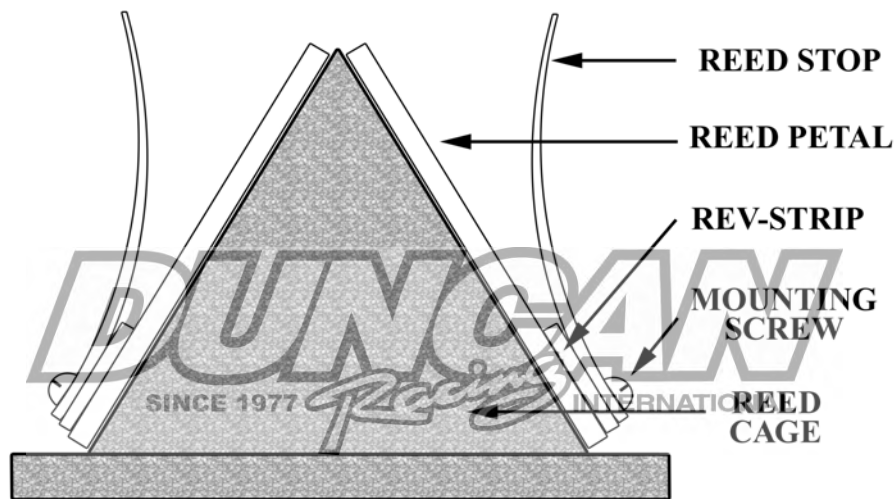

*Caution: Do not install these reeds without stock reed stops. Without them, premature wear and eventually a fractured reed petal may result. Petals should be replaced every 6-10 hours of operation.

**Should you have any problems or questions please call Duncan Racing.